

SPECIFICATIONS

CONTACT RATING: 24VDC, 25mA (switching Rating)

50VDC, 100mA (non-switching Rating)

ELECTRICAL LIFE: Contact Resistance.

200mΩ max. 20,000 cycles.

CONTACT RESISTANCE: 100 mΩ max. (initial)

INSULATION RESISTANCE: 100 MΩ min. at 250 VDC

OPERATION FORCE: (200gf.cm) max

STORAGE TEMPERATURE: -40°C to 85°C



SOLDERABILITY: 230±5°C 3±sec. 75%

SOLDER RESISTANCE: Automatic Soldering

HUMIDITY: 40±2°C 90~95% RH for 96 hours.


TERMAL TEST: 85±2°C FOR 96 hours

COLD TEST: -40°C±2°C for 96 hours

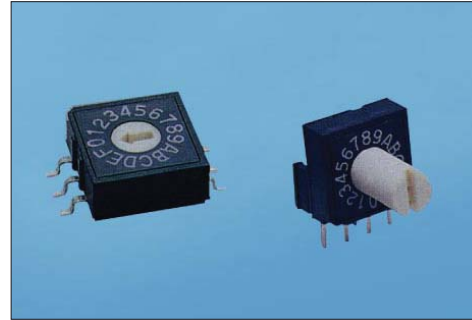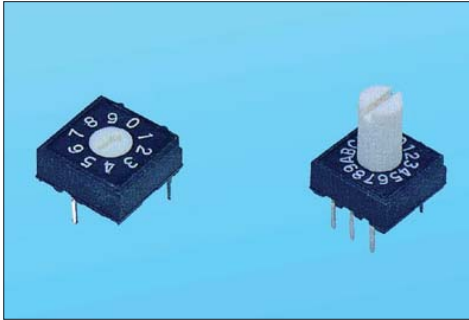


DIMENSIONS


RH3

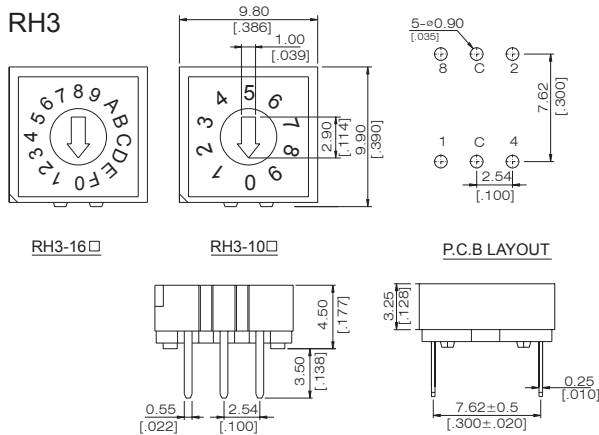

RV3

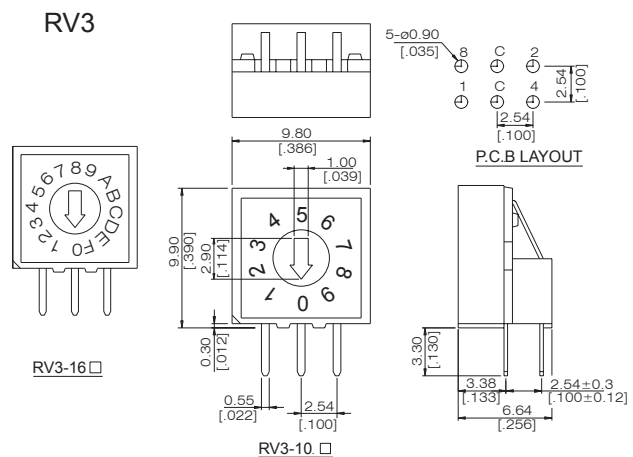

RM3

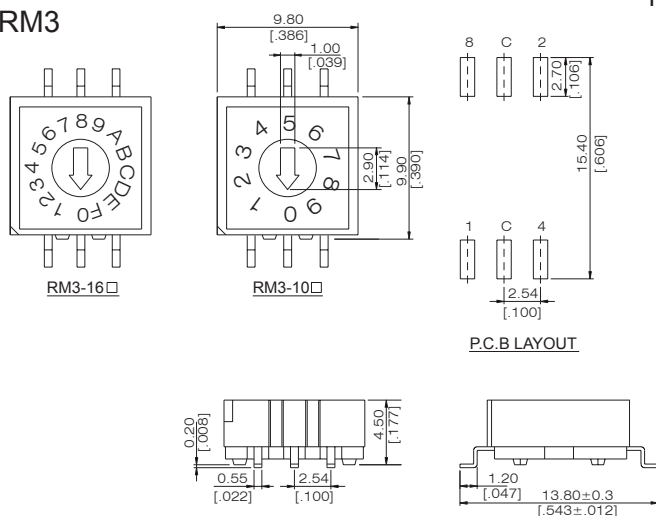

HOW TO ORDER

R ☐ ☐ ☐ ☐ - ☐ ☐ ☐ ☐ - ☐

RoHS code
H = RoHS Compliant

Package Style:
☐ = Tube Package
T/R = Tape & Reel

R = Real Codes.

Number Of Steps:
10 = 10 Steps.
16 = 16 Steps.

Soldering Plating
A = Terminal:
Gold plated over nickel

Actuator Type:
☐ = Recessed Actuator
H = High Actuator
M = 3.2 mm

Number of Terminals
4 = 4x1
3 = 3x3
2 = 3x2

Terminal Type
H = Through Hole
V = Right angle
M = S.M.T